

INSTRUCTIONS FOR HANGING A DA-LITE SCREEN TO A DROPPED OR SUSPENDED CEILING

For use with Model B, Class-Rite or Electrolet Screens. For screens up to 50 lbs. Do not use on screens weighing over 50 lbs.

1. Measure distance between D-rings of screen and transfer this distance to T-bar for location of scissors clip.
2. Open scissors clip as in Fig. 1.
3. Squeeze tight on T-bar as in Fig. 2 and Fig. 3.
4. Screw adapter to scissors clip as shown in Fig. 4.
5. Insert S-hook into hole of adapter and D-ring of screen as in Fig. 5.
6. Use pliers to close both loops of S-hook.
7. Do not remove for re-use.



FIG. 1



FIG. 2




FIG. 3


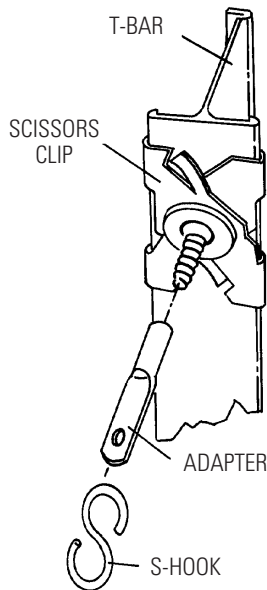


FIG. 4

Assembly Instructions For T-Bar Scissors Clip



The **POWER** In PRESENTATION PRODUCTS

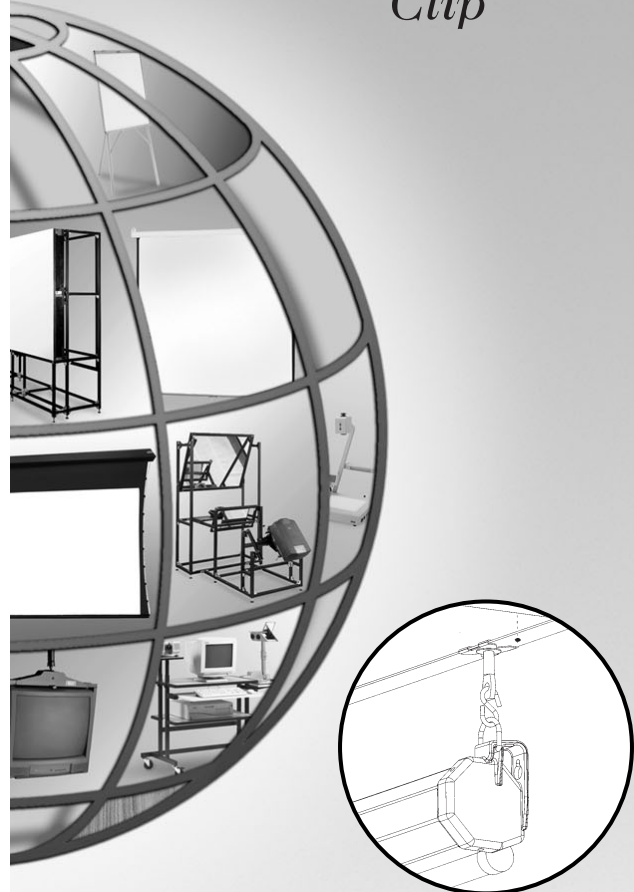

DA-LITE SCREEN COMPANY, INC.

3100 North Detroit Street
Post Office Box 137
Warsaw, Indiana 46581-0137
Phone: 574/267-8101
800-622-3737
Fax: 574/267-7804
[http:// www.da-lite.com](http://www.da-lite.com)
e-mail: info@da-lite.com

T-BAR SCISSORS CLIP

